




Description

The Kommander-KA02 I is an exceptional addition to the K-array™ collection ecosystem, offering a compact amplifier platform that combines powerful performance with advanced digital signal processing (DSP) capabilities. With its highly integrated design, this amplifier platform delivers 4x 50 W @ 4Ω power output.


The Kommander-KA02 I offers pristine sound and complete control over the connected loudspeakers, either as a stand alone driving unit and connected with other

K-array amplifiers in complex and demanding applications.


The dedicated K-array™ Connect mobile app provides a user friendly interface for remote control of the DSP main parameters and easy configuration of the signal routing.

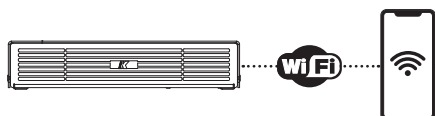

K-framework3 is the managing and control software dedicated to professionals and operators looking for a powerful tool for loudspeakers system design and tuning of large a number of units over a wired LAN.

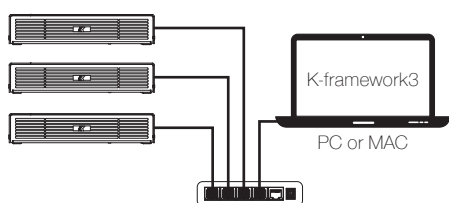


- 1U Class D audio amplifier 4x 50 W @ 4Ω.
- DSP onboard with:
 - Channel Grouping: group controls over multiple channels;
 - Input EQ: 3 bands fully parametric equalizer;
 - Output EQ: 8 bands fully parametric selectable filters: Peaking, High-Shelf, Low-Shelf, High-Pass, Low-Pass, HP-Butterworth, LP-Butterworth;
 - Dynamic limiters;
 - Signal routing: freely assignable input-to-output signal path with level adjustment;
 - Channel delay up to 230 ms.
- Integrated Electronic Brain (IEB) with osKar custom operating system running on quad core 1.5 GHz internal processor.
- REST API for easy integration with third-party remote control systems.
- K-array Connect mobile app for easy wireless access to the DSP features.
- K-framework3 multiplatform software for loudspeaker system design, managing, tuning and control of multiple

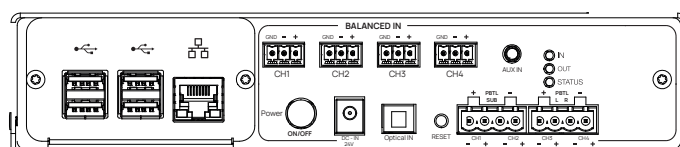

Technical Specifications

| General | |
|---------------------------|--|
| Type | 4ch switching mode, Class D Amplifier |
| Output Power ¹ | 4x 50 W @ 4 Ω |
| Impedance | minimum 4 Ω (2 Ω PBTl) |
| Frequency Response | 20 Hz – 20 kHz (±1 dB) |
| Connectors | Input: 4x BAL input: Euroblock 1.5/ 3-ST-3.81, 3.5 mm jack unBAL analog stereo AUX input, TOSLINK optical input, Output: 2x Euroblock 2,5/ 4-G-5,08 Digital: 4x USB-A 2.0, 1x RJ45 Ethernet, Bluetooth 4.1 Low Energy, Wi-Fi IEEE 802.11 b/g/n |
| Built-in DSP | Grouping, Input EQ, Output EQ, Signal Routing, Level adjustment, Dynamic Limiters, Delay |
| Remote control | Wi-Fi dedicated K-array Connect mobile app Ethernet wired K-framework3 multiplatform design and tuning software |
| MAINS Operating Range | Dedicated AC/DC power adapter 100-240V ~ AC, 50-60 Hz input / 24 V, 4 A DC output |
| Power Consumption | 20 W @ 4 Ω load, Pink noise, 1/8 rated power |
| Protections | Over Temp. (Power Limiting – Thermal Shutdown), Short Circuit/Overload Output Protection, Power Limiting, Clip Limiter/ Permanent Signal Limiter, High Frequency Protection |

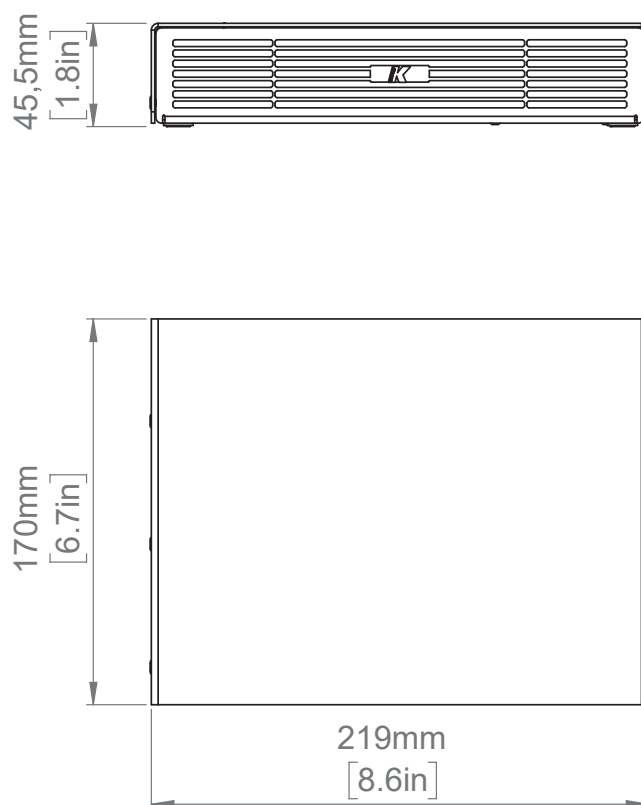

| Handling & Finishes | |
|---------------------|--|
| IP Rating | IP20 |
| Dimensions (WxHxD) | 219 x 45,5 x 170 mm (8.6 x 1.8 x 6.7 in) |
| Weight | 0.7 kg (1.5 lb) |
| Material | Aluminum |

¹ CTA-2006 (CEA-2006) Amplifier Power Standard, single channel driven.



Notes:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.
New materials and designs are introduced into existing products without previous notice.
Present systems may differ in some respects from those presented in this document.

