

Panasonic

Wireless presentation system
Receiver

TY-WPR1



Set content

Product name	Receiver
Number	1
Carton dimensions	W250 x H89 x D180 mm (W9.85" x H3.51" x D7.09")
Gross weight	1.2 kg / 2.64 lbs
Accessories	Receiver mounting bracket, HDMI cable, AC adapter, AC adapter conversion plug, AC adapter cable, Operating manual

Receiver

● PRODUCT SPECIFICATION

(design and specification subject to change without notice)


SPECIFICATION	
Maximum output resolution / Frame rate	1920 x 1080/60p (max), 3840 x 2160/30p (max.)
Transmitter simultaneous connections	32
Simultaneous display sources	4
Data rate (Wired)	10/100/1000 (Mbps)
Data rate (Wireless)	Max.867 Mbps
Frequency band	5 GHz band 5,150 MHz - 5,250 MHz 36 40 44 48 Channel
Wireless standards	IEEE802.11a/n/ac
Security	WPA/WPA2/WPA3 (WPA3-Enterprise is not supported)
LED	White: Power Input LAN Connection WiFi Connection USB Connection
Reach (Max distance between transmitter and receiver)	30 m (When the line of sight/wave conditions are good)
Connection terminal	HDMI/USB-A (female)/RJ45 (LAN)
ELECTRICAL	
Power requirements	DC 5 V/2 A
Power consumption (During image display)	10 W
MECHANICAL	
Dimension	W120 x H26 x D81 mm (W4.71" x H1.03" x D3.19") (Excluding antenna)
Weight	approx.181 g/0.4 lbs
Color	Black
Fan	None
Material	Plastic
Anti-theft	Security slot
ENVIRONMENTAL	
Operating environment	Temperature: 0 °C to 35 °C (32 °F to 95 °F) Humidity: 20% to 80% (No condensation)
Storage environment	Temperature: -20 °C to 60 °C (-4 °F to 140 °F) Humidity: 20% to 80% (No condensation)
MAIN FEATURE	
HDMI-CEC	Yes
Wireless Display	Yes
AUTHENTICATION	
CE, FCC, MIC	

● LIST OF CORRESPONDENCE SIGNALS

HDMI Output signal type		
3840x2160@30Hz RGB	1920x1080@60Hz	1280x720@60Hz
1920x1080@60Hz RGB	1920x1080@50Hz	1280x720@50Hz
4096x2160@24Hz	1920x1080@24Hz	1024x768@60Hz
3840x2160@30Hz	1280x1024@60Hz	800x600@60Hz
3840x2160@25Hz	1280x960@60Hz	
3840x2160@24Hz	1280x800@60Hz	

● DIMENSIONS

Units : mm [inch]

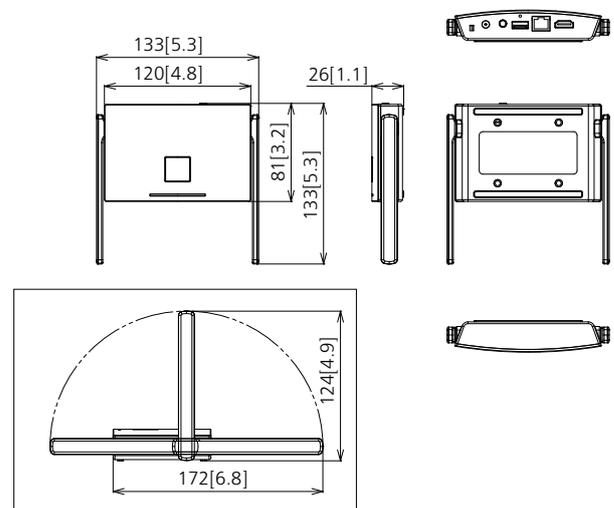

● CONNECTION TERMINAL

