

Anakonda-KAN200+ KAN200+8



Flexible array element speaker



DATASHEET

Installed Sound Anakonda-KAN200+ | KAN200+ 8


DESCRIPTION

Like every K-array product, the Anakonda-KAN200+/KAN200+8 is a revolutionary speaker module that before its existence, was unimaginable. It is designed as a problem solver for situations where a traditional speaker box can't be used but where good intelligibility, ultra-reliability and a sleek design are required. The Anakonda is the perfect fit for any distributed sound application. Its dedicated presets work on a wide frequency range and can be used as


an audio system in combination with K-array subwoofers. Its lightness and flexibility help it to be easily integrated in existing structures. One Anaconda is 2m in length and can be extended with up to a maximum of 16 elements on one line, which creates a 32m line of continuous sound. Each module is equipped with two Speakon NL4 connectors and are completely integrated in the "body" of the speaker. Once they are connected, they are hidden in the shape of

the line. Each Anakonda is provided with 2 fabric socks, one black and one white, which can be used to cover and protect the speaker from foreign objects like dust, and also give the possibility to change colors to match its surroundings. Wall brackets are included in the package to make the installation as easy and as fast as possible. All the components of the Anakonda are designed by the K-array R&D department and made in Italy under the K-array quality control system.

COLORS & PREMIUM FINISHES AVAILABLE



Black



1 Black / 1 White
Sleeve Included

SUGGESTED ACCESSORIES

K-ANLINK	

FREQUENT APPLICATIONS

- THEATERS & CONCERT HALLS
- EVENT PRODUCTIONS
- RETAIL
- TRANSPORTATION FACILITIES
- BROADCAST & STUDIOS
- HOTELS
- CAFES, BISTROS & RESTAURANTS
- MUSEUMS

FEATURES



Weather
Resistant



Visually
Discreet




Lightweight




Pure Array
Technology
(PAT)

TECHNICAL SPECIFICATIONS

ACOUSTICS	
Power handling	300W ^(AES)
Max Power	600 W ⁽¹⁾
Impedance	32 Ω - (8 Ω KAN200 + 8)
Frequency range	150 Hz – 18 kHz +/-6dB ⁽²⁾
SPL 1W/1mt	89 dB ⁽³⁾
Maximum SPL	102 dB (cont.) – 108 dB (peak) ⁽⁴⁾
COVERAGE	
Horizontal	160°
Vertical	10°
CROSSOVER	
Type	External Crossover Required
Frequency	150 Hz 24dB/oct suggested minimum
TRANSDUCERS	
Type	16 x 1" Neodymium cone driver with 0.75" voice coil
POWER AUDIO IN/OUT	
Connectors	2 x 4-pin Speakon (1 female, 1 male)
Wiring	1+ 1- (signal IN & LINK) 2+ 2- (Through)
RECOMMENEND AMPLIFIERS	
Type	KMT12, KMT18, KA84
CERTIFICATION	
IP	55
PHYSICAL OVERVIEW	
Dimensions	207.0 x 5.6 x 3.53 cm (81.49" x 2.2" x 1.4") ⁽⁵⁾
Weight	1.9 Kg (4.2 lb)
<p>1. Maximum RMS applicable power for a musical signal. The reference signal is the one proposed by EIAJ standard;</p> <p>2. With dedicated preset;</p> <p>3. Measured @8 m, then scaled @1 m;</p> <p>4. Measured with musical signal;</p> <p>5. (W x H x D).</p> <p>New materials and design are introduced into existing products without previous notice. Present systems may differ in some respects from those presented in this catalogue.</p>	

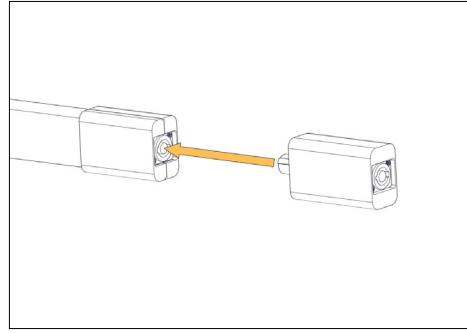

Anakonda-KAN200+
KAN200+ 8
+K-ANLINK

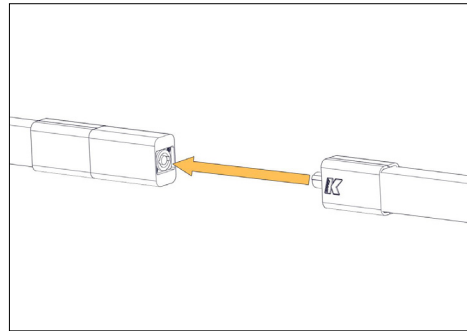

Anakonda-KAN200+
KAN200+ 8
+K-ANLINK

