

# Domino-KF26

Ultra-compact passive  
full-range speaker



**SONORA**  
PROFESSIONAL  
SERVICES

Petit-Fion 31 - Le Mont/Lausanne - 021 310 20 60 [www.sonora.ch](http://www.sonora.ch)

Audio-visuel médias technologie



DATASHEET

## DESCRIPTION

K-array presents its new full-range speaker line, Domino. These stainless steel compact speakers with plug and play capabilities do not require presets and can be driven by any amplifier making them the perfect solution for applications from intimate restaurants to live concert settings.

The new line consists of three speakers: the KF26, the KF210 and the KF212. The KF26 is the smallest of the trio measuring less than 12 cm deep. It is comprised of a 6" and a 2" neodymium magnet woofer coaxially mounted plus one 6" passive radiator to extend the bass response. The KF26 has a selectable impedance (8/32) and 90° coverage, horizontally and vertically.

Designed as a passive speaker, the KF26 can be transformed into a selfpowered speaker just by inserting the specific amplifier accessory, KA1-FF. With a max SPL of 109dB, the KF26 is the ideal for smaller installations that require high quality in a practical, compact form. The KF210 is the mid-sized option of the Domino line that has a 10" and a 3" neodymium magnet woofer coaxially mounted in addition to a 10" passive radiator. Like the KF26, the KF210 has selectable impedance and wide vertical and horizontal coverage. The largest and most powerful of the Domino line is the KF212. Comprised of a 12" coaxial transducer with a titanium dome and a 12" passive radiator, the KF212 really

packs a punch. With a depth of just 20 cm, the KF212 is the ideal solution for clubs and lounges up to live concerts.

The Domino line is accompanied by several product-specific accessories that can enhance the system's setup. Wall brackets are included while other useful tools are available for purchase, like the flush mount recessing frame, K-WF26 and K-WF210, used to further hide the speakers.

Domino is available in a 24 K gold plated finish as well as brushed or polished stainless steel finishes in addition to the standard sleek black and elegant white rendering them suitable for any venue.

Installed Sound Domino-KF26

## COLORS & PREMIUM FINISHES AVAILABLE



Black



White



Custom



Gold



Polished



Brushed

## SUGGESTED ACCESSORIES

K-2SPK

K-FLY2

K-FOOT2

K-JOINT2

K-KUIP

K-WF26

## FEATURES




Visually  
Discreet



Weather  
Resistant



Selectable  
Impedance



Full Range

## FREQUENT APPLICATIONS

CINEMAS

MUSEUMS

CAFES, BISTROS & RESTAURANTS

HOTELS

THEME PARKS


BROADCAST & STUDIOS

TRANSPORTION FACILITIES


RETAIL

## TECHNICAL SPECIFICATIONS

ACOUSTICS	
Power handling	160W
Impedance	8/32 Ohm selectable
Frequency range (-10 dB)	50Hz-19000Hz passive version / 45Hz-19000Hz with KA1-FF
SPL 1W/1mt	90 db
Maximum SPL3	109dB (cont) - 115dB (peak) passive version 106dB (cont) - 112dB (peak) with KA1-FF
COVERAGE	
Horizontal	90°
Vertical	90°
CROSSOVER	
Coaxial	Internal Passive Crossover
Frequency	1600 Hz
TRANSDUCERS	
Type	Low-mid frequencies: 1 x 6" Neodymium magnet woofer with two 1.5" voice coils + 1 x 6" passive radiator
Type	High frequencies: 2" Neodymium magnet woofer with two 0.8" voice coils
POWER AUDIO IN/OUT	
Connectors	1 x 4-pin phoenix connector
RECOMMENDED AMPLIFIERS	
Type	KA14 - KA24 - KA84 - KA1-FF
CERTIFICATION	
IP	56 (More complete water protection with K-KUIP accessory)
PHYSICAL OVERVIEW	
Dimensions	18.0 x 35.0 x 11.8 cm (7.08"x 13.77"x 4.64") <sup>(1)</sup>
Weight	6.5 Kg (14.33 lb)
<p>1. ( W x H x D ).</p> <p>New materials and design are introduced into existing products without previous notice. Present systems may differ in some respects from those presented in this catalogue.</p>	

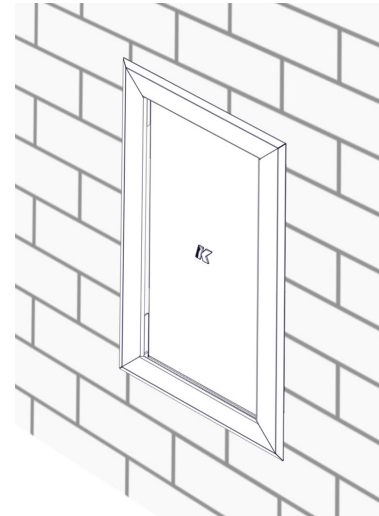

Domino-KF26+  
K-WF26

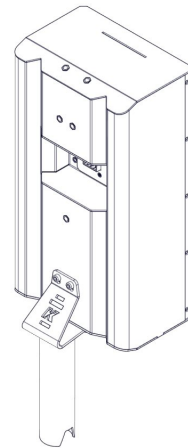

Domino-KF26+  
K-PMOUNT

