



## Description

The K-array Kobra-KK52 I is a passive speaker system comprised of eight 2" neodymium magnet transducers housed in an elegant and sturdy stainless steel chassis. The vertical dispersion pattern can be switched for wide or narrow coverage, allowing for a great variety of applications. The eight closely spaced cone drivers provide true line array characteristics-phase coherence, low distortion and focused listening in both the near field and at a distance from the speaker.

A variety of rigging accessories provides many linking and hanging options for the KK52 I (0.5 meter) and the larger (1 meter) KK102 I to be combined in vertical and horizontal line array configurations to satisfy many different venue requirements during temporary events and for permanent installations.

For easier use and integration with other speakers or amplifiers, the KK52 I allows the user to select two different values of impedance (16Ω – 64Ω). At 64Ω as many as 16 KK52 I speakers can be powered off a single amplifier channel at 4Ω. The KK52 I is able to reproduce the whole vocal frequency range with high intelligibility, starting from 150 Hz. Integrating one of the K-array Rumble or Thunder subwoofers (KU210, KU212, KMT12, KMT18, KMT21), assures excellent coverage of the entire musical frequency range. The K-array KA amplifier series have presets optimized for KK52 I use. All Kobra-KK52 I components are designed by the K-array R&D department and custommade under the K-array quality control system.

Colors		Premium Finishes		Features		Frequent Applications	
Black		Gold		Pure Array Technology (PAT)	Modular Capabilities	Auditorium, Education & Government	Event Productions
White		Polished		Weather Resistant	Selectable Coverage	Theaters & Concert Halls	Broadcast & Studios
RAL		Brushed		Selectable Impedence	EN54-24 Certified	Stadiums & Sport Venues	Retail

Accessories						
K-BASE2	K-FLY2	K-FOOT2	K-JOINT2	K-WALL2	K-WALL2L	KK-STAGE
K-IP65KITA	K-IP65KITB	K-KCLAMP	K-KCLAMP/S	K-PMOUNT	KK-CLUSTER	

## Technical Specifications

General	
Type	Line array
Transducers	8 x 2" neodymium magnet woofers
Frequency Response <sup>1</sup>	150 Hz – 18 kHz (-6 dB)
Max SPL <sup>2</sup>	120 dB (peak)
Rated Power	200 W
Coverage	V. 10° - 60°   H. 120°
Connectors	SpeakOn NL4: 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	16 Ω / 64 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	59 x 497 x 81 mm (2.3 x 19.6 x 3.2 in)
Weight	2,3 kg (5.07 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	Gold, Polished, Brushed

Regulations	
IP Rating	IP64 <sup>3</sup>
EN54-24	EN 54-24:2008 compliant <sup>4</sup>



Accessories	
Recommended Amplifier	Kommander-KA24, Kommander-KA84, Thunder-KMT12, Thunder-KMT18
Accessories	K-BASE2, K-FLY2, K-FOOT2, K-IP65KITA, K-IP65KITB, K-JOINT2, K-KCLAMP, K-KCLAMP/S, K-WALL2, K-WALL2L, KK-STAGE, KK-CLUSTER, K-PMOUNT

<sup>1</sup> With dedicated preset

<sup>2</sup> Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m

<sup>3</sup> More complete water protection with K-IP65KITA and K-IP65KITB accessories (IP65 compliant)

<sup>4</sup> See specification for EN 54-24 applications in products user's guide

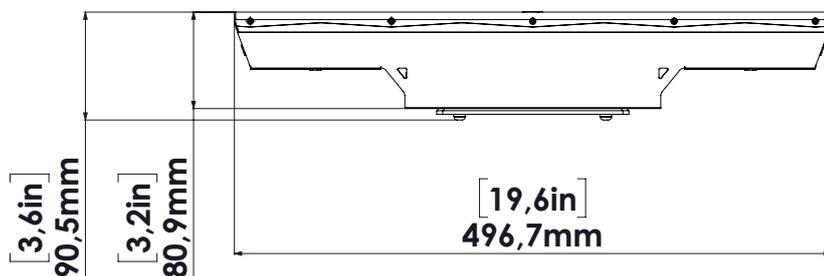

### Notes for data:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.

New materials and designs are introduced into existing products without previous notice.

Present systems may differ in some respects from those presented in this catalog.

