

AVer

SONORA
PROFESSIONAL
SERVICES INTÉGRATION
AUDIOVISUELLE



**CREATE
EXTRAORDINARY
STREAMS**

AVer PTZ310UV2



Dante AV-H™

Professional PTZ Camera

AVer PTZ310UV2 is a cutting edge PTZ Camera that features 4K 60 fps HDMI, USB and IP outputs. The 12X optical zoom lens moves remarkably fluidly to stream seamless video content. Embedded intelligent SmartShoot functionality offers the unprecedented flexibility to shoot anything from one presenter to numerous participants, making for a truly versatile professional streaming solution.



60 fps



4K Ultra HD



12X Optical Zoom



Exmor™ CMOS
Sensor



SmartShoot



IP/HDMI/USB/3G-SDI



Superior Camera
Motion



Intuitive Web UI



Upside-Down
Installation




Voice Tracking*

* Voice Tracking requires PTZ Link software.

12X Optical Zoom. Adapt Quickly.

The PTZ310UV2's 12X optical zoom camera, combined with its agile auto-focus, gives every participant the chance to be seen with excellent clarity. Never miss a spectacular moment, no matter how small.

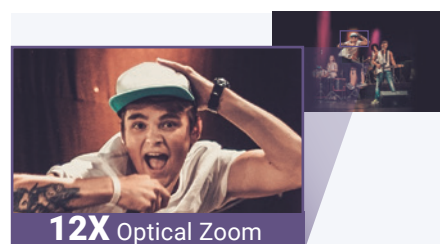


4K Ultra HD Resolution. Breathtaking.

The 4K Ultra HD resolution of the PTZ310UV2 makes every stream impressively clear, thanks to the industry-leading Sony sensor. This excellent image processor is able to automatically adjust video – ensuring great looking scenes no matter the situation or distance.



4K 60 FPS. HDMI, USB & IP.

Recognized by Newtek, the PTZ310UV2 features true 4K 60 fps streaming via HDMI, USB, and IP outputs. No annoying settings or messy cords, you can use multiple devices at the same time through the easier and smoother video streaming process.

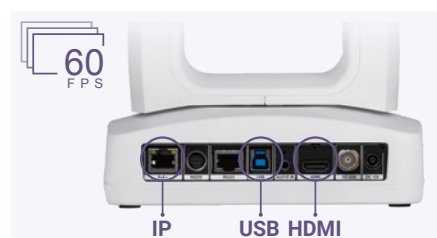

Camera Motion. Adjusted to Perfection.

Customizable movement speed settings from 0.1° to 200° per second deliver agile and precise motion control during streaming. The PTZ310UV2 offers sensitive yet smooth multi-angle movement for capturing an astonishing image.



SmartShoot. People and Content in Focus.

SmartShoot provides real-time Human Detection, which allows the camera to move automatically and smoothly between 4 preset zones without any manual operation. The PTZ310UV2 quickly switches between shooting zones by focusing on a presenter, consistently delivering a clear image of people and their content.



PTZ Link. Bring Voice Tracking to PTZ Cameras.

PTZ Link is the one and only software in the market to connect PTZ Cameras to microphone systems. With the aid of PTZ Link, you can easily turn AVer's PTZ Camera to a voice tracking camera through setting preset points, then automatically switch focus between different speakers.



Product Specifications

Camera		General	
Image Sensor	1/2.8" 4K Exmor CMOS	Power Requirement	AC 100 - 240V to DC 12V/2A
Effective Picture Elements	8 Megapixels	Power Consumption	19W
Output Resolutions	4K/60, 4K/59.94, 4K/50, 4K/30, 4K/29.97, 4K/25, 1080p/60, 1080p/59.94, 1080p/50, 1080p/30, 1080p/29.97, 1080p/25, 1080i/60, 1080i/59.94, 1080i/50, 720p/60, 720p/59.94, 720p/50	PoE	PoE+
		Dimensions (W x H x D)	180.0 x 192.0 x 145.0 mm
		Net Weight	2.0 (±0.1) kg
		Application	Indoor
Minimum Illumination	0.46 lux (IRE50, F1.6, 30fps)	Tally Lamp	Yes
S/N Ratio	≥ 50 dB	Security	Kensington Slot
Gain	Auto, Manual	Remote Control	Infrared
TV Lines	1600 (Center/Wide)	Operating Conditions	Temperature : 0 °C to +40 °C ; Humidity : 20% to 80%
Shutter Speed	1/1 to 1/32,000 sec		
Exposure Control	Auto, Manual, Priority AE (Shutter, IRIS), BLC, WDR	Storage Conditions	Temperature : -20 °C to +60 °C ; Humidity : 20% to 95%
White Balance	Auto, Manual, ATW, One Push		
Optical Zoom	12X	IP Streaming	
Digital Zoom	12X	Resolution	4K 60fps
Total Zoom	144X	Network Video Compress Formats	H.264, H.265, MJPEG
Viewing Angles	DFOV : 80.6° (Wide) to 7.7° (Tele) HFOV : 72.8° (Wide) to 6.7° (Tele) VFOV : 44.1° (Wide) to 3.8° (Tele)	Maximum Frame Rate	4K 60fps
		Bit-Rate Control Modes	VBR, CBR (selectable)
		Range of Bit-Rate Setting	512 Kbps to 120 Mbps
Focal Length	f = 3.9 mm (Wide) to 46.8 mm (Tele)	Network Interface	10 / 100 / 1000 Base-T
Aperture (Iris)	F = 1.6 (Wide) to 2.8 (Tele)	Multi-Stream Capability **	5 4K 60fps: RTSP, HDMI, USB, & NDI® HX3 / Dante AV-H 1080p 60fps: 3G-SDI
Minimum Working Distance	0.3 m (Wide), 1.5 m (Tele)		
Pan / Tilt Angles	Pan : ±170°, Tilt : +90° / -30°	Network Protocols	IPv4, TCP, UDP, ARP, ICMP, IGMP, HTTP, HTTPS, DHCP, RTP / RTCP, RTSP, RTMP, SRT, HLS, NDI, LLDP, VISCA over IP
Pan / Tilt Speed (Manual)	Pan : 0.1° to 100° / sec, Tilt : 0.1° to 100° / sec	AV over IP Protocols	NDI® HX3 & Dante AV-H
Preset Speed	Pan : 200° / sec, Tilt : 200° / sec	USB	
Preset Positions	10 (IR), 256 (RS-232, RS-422, IP)	Connector	USB 3.1
Camera Control - Interfaces	RS-232 (DIN8), RS-422 (RJ45), IP	Video Formats	MJPEG, YUY2
Camera Control - Protocols	VISCA (RS-232 / RS-422 / IP), PELCO-D & PELCO-P (RS-232 / RS-422), CGI (IP)	Maximum Video Resolution	2160p
		USB Video Class (UVC)	UVC 1.1
Image Processing	Noise Reduction (2D / 3D), Flip, Mirror	USB Audio Class (UAC)	UAC 1.0
Power Frequencies	50 Hz, 60 Hz	Web UI	
AI Function		Live Video Preview	Yes
Mode	SmartShoot	Camera PTZ Control	Pan, Tilt, Zoom, Focus, Preset Control
Audio		Camera / Image Adjustment	Exposure, White Balance, Picture
Channels	2ch Stereo	Network Configuration	DHCP, IP Address, Gateway, Subnet Mask, DNS
Codecs	AAC-LC	Software Tools	
Interface		IP Search and Configuration Tool	Support Windows® 7 or later
Video Outputs	3G-SDI, HDMI, IP, USB	Enterprise Management	Support Windows® 10 or later
Audio Outputs	3G-SDI, HDMI, IP, USB	Control Panel	Supports iOS & iPadOS® 11 or later
Audio Inputs	MIC in, Line in	PTZ Link	Supports Windows® 7 or later, macOS® 10.14 or later
Warranty		OBS Plugin for PTZ Cameras	Supports Windows® 8 or later, macOS® High Sierra v10.13 or later
Camera	5 Years	CaptureShare	Supports Windows® 7 or later, macOS® 10.14 or later
Accessories	1 Year	Room Management	Supports Windows® 7 or later, macOS® 11.6 or later
Package Contents		Cloud Management	Supports Chrome™ & Microsoft Edge browsers
Camera, Drilling Paper, Ceiling Mount Bracket (x2), Quick Start Guide, Cable Fixing Plate, M2 x 4 mm Screw (x3), Power Adapter & Power Cord, 1/4"-20 L=6.5 mm Screw (x2), Remote Control, M3 x 6 mm Screw (x3), DIN 8 to D-Sub 9 Cable, RS-232 In/Out Y Cable, Cable Ties (x4)		Optional Accessories	
		Aver CL01 PTZ Camera Controller, L-Type Ceiling Mount	


* Specifications may vary depending on location and are subject to change without notice.
** When choosing NDI® HX3 Mode, USB video will be disabled.

Product Appearance

Front & Side



Back

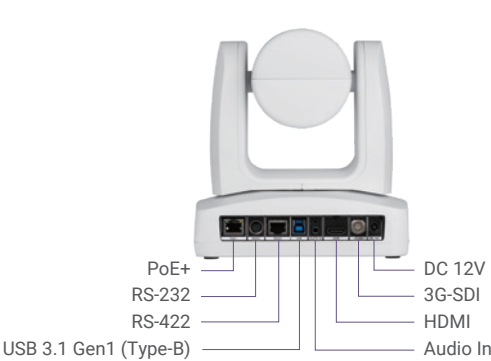

Distributor/Dealer

