




HDBaseT™ CSC Receiver



Description

Our RX70CS HDMI 2.0 4K 60Hz 4:4:4 (18Gbps) HDCP 2.2 HDBaseT™ ARC Receiver offers market leading features and outstanding value utilising CSC technology.


The product extends HDMI, Bi-directional IR & RS-232 and is powered by the matrix up to lengths of 70m (4K 40m). The Receiver features ARC support when used with compatible Blustream hardware and simultaneous analogue stereo and Optical Toslink audio breakout.

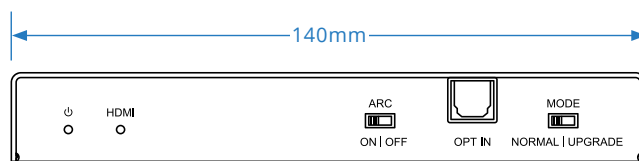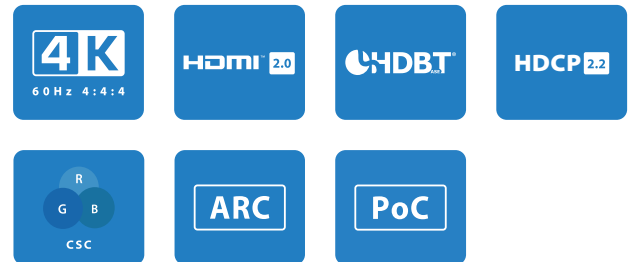

Key Features

- Advanced HDBaseT™ technology offering distribution of video and audio over a single CAT cable
- Advanced Colour Space Conversion (CSC) supports HDMI2.0 18Gbps specification including HDR
- Extends HDMI 1080p up to a distance of 70m over a single CAT cable
- Supports 4K 60Hz 4:4:4 UHD video up to 40m
- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K
- Automatic downscaling of up to 4K 60Hz 4:4:4 video input to 1080p
- Supports ARC (Audio Return Channel) from connected display via HDMI or Optical digital inputs (when used with compatible Blustream transmitter / matrix)
- Supports all known HDMI audio formats including Dolby TrueHD, Atmos and DTS-HD Master Audio transmission
- Bi-directional RS-232 pass-through
- Supports bi-directional IR pass-through to compatible HDBaseT™ device
- Supports PoC (Power over Cable) from Blustream matrix or transmitter products
- HDCP 2.2 support

Transmission Distance via Cat6

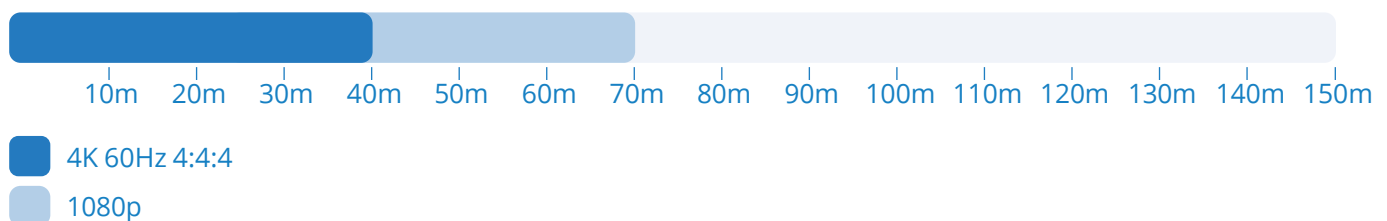



Connectivity

- **Video Input Connectors:** 1 x HDBaseT™ RJ45 connector
- **Video Output Connectors:** 1 x HDMI Type A, female
- **Audio Input Connectors:** 1 x Toslink (S/PDIF)
- **Audio Output Connectors:** 1x Toslink (S/PDIF), 1 x 3.5mm L/R Analogue audio
- **RS-232 Serial Port:** 1 x 3-pin Phoenix connector
- **IR Input Port:** 1 x 3.5mm stereo jack
- **IR Output Port:** 1 x 3.5mm mono jack

Specifications

- **Mounting Kit included**
- **Casing Dimensions (W x H x D):** 140 x 84 x 18mm
- **Dimensions Including Connections (W x H x D):** 140 x 98 x 18mm
- **Power Supply:** 12V/1A DC, screw type connector (not included)
- **Shipping Weight:** 0.5Kg
- **Operating Temperature:** 32°F to 104°F (-5°C to +55°C)
- **Storage Temperature:** -4°F to 140°F (-25°C to +70°C)

Included Accessories

Mounting 2 x Brackets

Matrix Compatibility

Compatible with the following matrices:

- AMF42AU
- HMXL42ARC
- HMXL66ARC
- HMXL88ARC
- SW41HDBT
- C66CS
- C88CS

Regulatory Compliance



CAN ICES-3 (B)/NMB-3(B)



SONORA
PROFESSIONAL
SERVICES

Petit-Flon 31 - Le Mont/Lausanne - 021 310 20 60 www.sonora.ch

Audio-visuel médias technologie

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.